

11:28

14:28

15:28

LOS ANGELES

OHIO


JAPAN

BTZ-42418-3



SPECIFICATIONS

- TYPE:----- DIGITAL
- DISPLAY: ----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT: ----- 1.8" (45.72 mm)
- VISIBILITY: ----- 75 Ft. (22.86 METERS)
- POWER REQUIREMENTS:----- 100-240V 50~60Hz (12vdc Switching Power Supply)
- FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS: ----- 6.25" x 36.25" x 1.38"
- WEIGHT: ----- 13.5 lbs.
- OPERATING TEMP.: ----- -17° TO 180° F
- HUMIDITY: ----- 0% TO 95% NON-CONDENSING
- OPERATING MODE:----- IRR REMOTE WITH SYNCHRONIZED ZONES

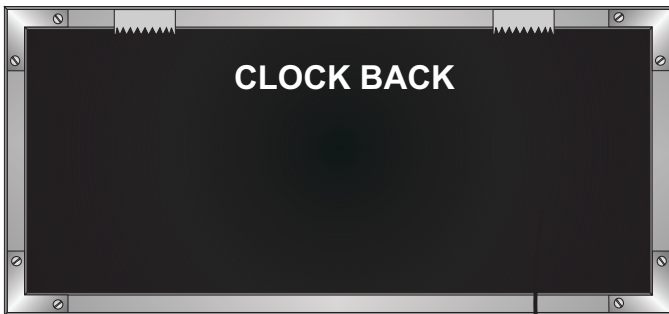

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.



1 SEC A YEAR ACCURATE (TCXO)

- 1.8", 2.5" and 4" DIGIT SIZE
- 12 OR 24 HOUR FORMAT
- 2 TO 24 ZONES
- NON GLARE LENS
- SUPER BRIGHT LEDS
- CUSTOM LETTERING TO YOUR SPECIFICATION
- BLACK ANODIZED ALUMINUM FRAME
- 10 YEAR LITHIUM BATTERY BACKUP (Standard)
- AUTOMATIC DAY LIGHT CORRECTION (Standard)
- INFRARED REMOTE CONTROL (Standard)
- ONE SEC A YEAR ACCURACY (TCXO) (Standard)

